

## PATENT COOPERATION TREATY

9/980172

PCT

From the INTERNATIONAL BUREAU

NOTIFICATION OF THE RECORDING  
OF A CHANGE(PCT Rule 92bis.1 and  
Administrative Instructions, Section 422)

To:

ATKINSON, Ralph  
Atkinson Burrington  
25-29 President Buildings  
President Way  
Sheffield S4 7UR  
United Kingdom

RECEIVED

OCT 25 2002

Technology Center 2600

Date of mailing (day/month/year) 11 septembre 2002 (11.09.02)	
Applicant's or agent's file reference 2040-P130-WO	IMPORTANT NOTIFICATION
International application No. PCT/GB01/01429	International filing date (day/month/year) 30 mars 2001 (30.03.01)

## 1. The following indications appeared on record concerning:

☒ the applicant ☐ the inventor ☐ the agent ☐ the common representative

## Name and Address

ELECTROTEXTILES COMPANY LIMITED  
Charter Court, Midland Road  
Hemel Hempstead  
Hertfordshire HP2 5GE  
United Kingdom

## State of Nationality

GB

## State of Residence

GB

Telephone No.

Facsimile No.

Teleprinter No.

## 2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:

☐ the person ☒ the name ☐ the address ☐ the nationality ☐ the residence

## Name and Address

ELEKSEN LIMITED  
Charter Court, Midland Road  
Hemel Hempstead  
Hertfordshire HP2 5GE  
United Kingdom

## State of Nationality

GB

## State of Residence

GB

Telephone No.

Facsimile No.

Teleprinter No.

## 3. Further observations, if necessary:

## 4. A copy of this notification has been sent to:

☒ the receiving Office ☐ the designated Offices concerned  
☐ the International Searching Authority ☒ the elected Offices concerned  
☒ the International Preliminary Examining Authority ☐ other:

<p>The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland</p> <p>Facsimile No.: (41-22) 740.14.35</p>	<p>Authorized officer</p> <p>Carine SEVILLANO (Fax 022 338 87 40)</p> <p>Telephone No.: (41-22) 338.83.38</p>
--	---

## PATENT COOPERATION TREATY

PCT

NOTIFICATION OF THE RECORDING  
OF A CHANGE(PCT Rule 92bis.1 and  
Administrative Instructions, Section 422)

From the INTERNATIONAL BUREAU

To:

ATKINSON, Ralph  
Atkinson Burrington  
25-29 President Buildings  
President Way  
Sheffield S4 7UR  
United Kingdom

Date of mailing (day/month/year)

11 septembre 2002 (11.09.02)

Applicant's or agent's file reference

2040-P130-WO

## IMPORTANT NOTIFICATION

International application No.

PCT/GB01/01429

International filing date (day/month/year)

30 mars 2001 (30.03.01)

1. The following indications appeared on record concerning:



the applicant



the inventor



the agent



the common representative

Name and Address

ELECTROTEXTILES COMPANY LIMITED  
Charter Court, Midland Road  
Hemel Hempstead  
Hertfordshire HP2 5GE  
United Kingdom

State of Nationality

GB

State of Residence

GB

Telephone No.

Facsimile No.

Teleprinter No.

2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:



the person



the name



the address



the nationality



the residence

Name and Address

ELEKSEN LIMITED  
Charter Court, Midland Road  
Hemel Hempstead  
Hertfordshire HP2 5GE  
United Kingdom

State of Nationality

GB

State of Residence

GB

Telephone No.

Facsimile No.

Teleprinter No.

3. Further observations, if necessary:

4. A copy of this notification has been sent to:



the receiving Office



the designated Offices concerned



the International Searching Authority



the elected Offices concerned



the International Preliminary Examining Authority



other:

The International Bureau of WIPO  
34, chemin des Colombettes  
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer

Carine SEVILLANO (Fax 022 338 87 40)

Telephone No.: (41-22) 338.83.38

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
11 October 2001 (11.10.2001)

PCT

(10) International Publication Number  
**WO 01/75575 A2**

- (51) International Patent Classification<sup>7</sup>: **G06F 3/033**
- (21) International Application Number: **PCT/GB01/01429**
- (22) International Filing Date: **30 March 2001 (30.03.2001)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
0007679.4      30 March 2000 (30.03.2000)      **GB**
- (71) Applicant (*for all designated States except US*): **ELECTROTEXTILES COMPANY LIMITED [GB/GB]**; Charter Court, Midland Road, Hemel Hempstead, Hertfordshire HP2 5GE (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **SANDBACH, David, Lee [GB/GB]**; Flat C, 9 Westbourne Road, London N7 8AR (GB). **CHAPMAN, Christopher [GB/GB]**; 2 Spring Lane, Watlington, Oxon OX9 5QL (GB).
- (74) Agent: **ATKINSON, Ralph**; Atkinson Burrington, 25-29 President Buildings, President Way, Sheffield S4 7UR (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— *without international search report and to be republished upon receipt of that report*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*



WO 01/75575 A2

(54) Title: **DATA PROCESSING APPARATUS**

(57) Abstract: Data processing apparatus (101 and 102) configured to receive signals from an input sensor (106) arranged to duplicate or replace operations of a keyboard, in which the signals correspond to positions of mechanical interactions with the sensor (106). The apparatus comprises processing means (1202) configured to process data derived from the input sensor including positional data corresponding to the position of a mechanical interaction with said input sensor (106) and a second data type corresponding to the absence of a mechanical interaction with said input sensor. The processing means (1202) is configured to generate data representing a first character in response to processing an item of data of said second type followed by positional data corresponding to a first position, and to generate data representing a different second character in response to processing positional data corresponding to a different second position followed by an item of data of said second type.

09/980172

JC10 Rec'd PCT/PTO 29 NOV 2001  
PCT/GB01/01429

WO 01/75575

15/PATS

1

## Data Processing Apparatus

The present invention relates to a data processing apparatus configured to receive signals from an input sensor arranged to duplicate or  
5 replace operations of a keyboard.

Conventional electronic keyboards comprise of an array of sensors (switches), each corresponding to a particular key. During use, the sensors are interrogated sequentially to determine which are being pressed.

Input sensors arranged to replace operations of a conventional  
10 keyboard are known, an example being the touch screen of a hand-held computer, such as a Palm (RTM) Vx, when used in a keyboard mode. In keyboard mode, an array of keys are displayed on the screen, below an area into which typing may be produced. A particular letter, number or symbol may be selected by pressing the screen with a stylus at the correct  
15 location. On pressing the screen, the particular key changes colour to indicate that its selection has been recognised by the computer, and on releasing the pressure, the selected letter is added to the typing on screen.

A disadvantage of this type of system, is that the computer is only able to accurately recognise individual "key-presses". If two keys are pressed such  
20 that the second is pressed before the first is released, neither of the pressed keys are interpreted by the computer as having been pressed. In circumstances where over-lapping key-presses can take place, for instance where the touch screen is large enough to accept finger presses from more than one digit, this limitation tends to provide for slow input of data compared  
25 to a conventional keyboard system.

WO 01/75575

PCT/GB01/01429

## 2

According to a first aspect of the present invention there is provided data processing apparatus configured to receive signals from an input sensor arranged to duplicate or replace operations of a keyboard, said signals corresponding to positions of mechanical interactions with said sensor, said apparatus comprising: processing means configured to process data derived from said input sensor including positional data corresponding to the position of a mechanical interaction with said input sensor and a second data type corresponding to the absence of a mechanical interaction with said input sensor, wherein said processing means is configured to generate data representing a first character in response to processing an item of data of said second type followed by positional data corresponding to a first position, and to generate data representing a different second character in response to processing positional data corresponding to a different second position followed by an item of data of said second type.

Preferably said sensor is an XY position sensor, and said positional data corresponds to the position within a continuous area defined by said sensor. For the purposes of this specification, an XY position sensor is defined to be a sensor which is capable of providing two electrical values that each relate to the two dimensional position of a mechanical interaction on the surface of the sensor.

The processing means may comprise a single processing device. However, in a preferred embodiment, said processing means comprises two processing devices, such that: one of said processing devices is configured to receive said signals from said input sensor and to generate said positional data and data of said second data type; and the second of

WO 01/75575

PCT/GB01/01429

3

said processing devices is configured to process said positional data and data of said second data type to generate data corresponding to displayable characters. Preferably, the first processing device is configured to generate a stream of data comprising positional data, and to send  
5 positional data to said second processing device only when an item of positional data differs from the immediately preceding item of sent data by more than a predetermined amount.

According to a second aspect of the present invention there is provided a method of processing signals received from an input sensor  
10 arranged to replace operations of a keyboard, said signals corresponding to positions of mechanical interactions with said sensor, wherein said method comprises: processing data derived from said signals, said data comprising positional data corresponding to the position of a mechanical interaction with said input sensor and a second data type corresponding to the  
15 absence of a mechanical interaction with said input sensor, such that data representing a first character is generated in response to processing an item of data of said second type followed by positional data corresponding to a first position, and data representing a different second character is generated in response to processing positional data corresponding to a  
20 different second position followed by an item of data of said second type.

The invention will now be described by way of example only, with reference to the accompanying drawings in which:

*Figure 1* shows hand held computer **101** and attached manually operable keyboard **102** embodying the present invention;

25 *Figure 2* shows the keyboard **102** of *Figure 1* disconnected;

WO 01/75575

PCT/GB01/01429

4

*Figure 3* shows an exploded perspective view of the keyboard of *Figure 2*, illustrating its constituent layers;

*Figure 4A and 4B* show the electrically conductive fabric layers **301** and **302** of *Figure 3* in more detail;

5 *Figure 5* shows an interface circuit **501**, present in the computer receiving assembly **105** of *Figure 1*;

*Figures 6A, 6B, 6C and 6D* illustrate an overview of the measurements made by interface circuit **501**;

10 *Figure 7* shows a flow chart of the program running within the peripheral interface circuit of *Figure 5*;

*Figure 8* shows step **701** of *Figure 7* in further detail;

*Figure 9* shows step **703** of *Figure 7* in further detail;

*Figure 10* shows step **705** of *Figure 7* in further detail;

*Figure 11* shows a rear view of the computer **101**;

15 *Figure 12* shows a schematic view of computer **101**;

*Figure 13* shows a flow chart illustrating the keyboard application program running in the computer **101**;

*Figure 14* shows a photocopier **1401** providing an alternative embodiment of the present invention;

20 *Figure 15* shows schematically a touch sensitive screen **1403** and a micro-controller **1501** located in the photocopier **1401**.

### **Figure 1**

25 A hand held computer **101** and attached manually operable keyboard **102**, embodying the present invention are shown in *Figure 1*. The computer **101** is a Palm (RTM) Vx with a touch sensitive LCD display. In

WO 01/75575

PCT/GB01/01429

5

some modes of operation, the computer **101** displays a keyboard on its LCD display **103** and keys may be selected by manual operation of a stylus upon the screen **103**. The purpose of the keyboard **102** is to effectively replace this displayed keyboard, thereby allowing an operator to make use of the keyboard by direct application of their fingers, in a similar manner to the operation of a standard keyboard. In this way, the entry of alphanumeric data can take place much more quickly, in a way which is generally more familiar to operators and users.

The keyboard comprises an XY position sensor **106** manufactured from a number of layers of material, such that two conducting layers are separated by non-conducting layers. The non-conducting layers are configured to allow said conducting layers to become electrically connected at the location of a key, when that key is pressed. The keyboard also includes a flexible cable **104** which physically and electrically connects the conducting layers of the sensor **106** to a computer receiving assembly **105**. The computer receiving assembly **105** contains an interface circuit and a connector configured to connect with the connector located at the lower rear of the computer **101**. Thus, connections on the receiving assembly **105** make electrical connection with the serial port of the computer **101**, along with its ground and power supply terminals. The computer **101** supplies approximately four volts to the interface circuit when its batteries are fully charged but this may drop to approximately 3.7 volts as the batteries become low on charge. For the purposes of this description it will be assumed that the interface circuit receives four volts from the computer **101**.

In an alternative embodiment, the interface circuit is powered by batteries located within the computer receiving assembly **105**.



WO 01/75575

PCT/GB01/01429

## 6

Before using the keyboard **102**, keyboard application software is firstly downloaded to the computer **101**. Thus, in a conventional manner, the Palm, with the keyboard detached, is placed in its Hotsync cradle which is connected by its cable to a personal computer (PC) or other computer suitable for the process. The keyboard application software, which may be resident for example on a disc in the floppy disc drive or CD-ROM drive of the PC, is selected by the user for installation, and then transferred to the computer **101** by a Hotsync process.

During operation of the keyboard, the interface circuitry applies voltages across a first conducting layer within the keyboard **101** and when a user presses an individual key, the interface circuitry measures voltages appearing on a second conducting layer to determine an X co-ordinate of the key being pressed. It then applies a voltage across the second conducting layer and measures voltages appearing on the first conducting layer to determine an Y co-ordinate. Having detected the X and Y location of the pressed key, the interface circuitry supplies data to the computer **101** relating to said X and Y location. With the keyboard application installed and running, the computer **101** is able to receive the X and Y location data and generate a character corresponding to the pressed key. Thus, when the "G" key is pressed a "G" or "g" appears on the display **103**.

Unlike previous arrangements, in which the keyboard comprises an X and Y location sensor, the computer and keyboard arrangement of *Figure 1* is able to receive and interpret two key-presses that overlap in time. i.e. when a second key is pressed before a first key is released, this arrangement recognises both the first and second key-presses. Such overlapping key-presses are likely to occur when a user types quickly. In fact, because such

WO 01/75575

PCT/GB01/01429

7

overlapping key-presses are acceptable to the system of *Figure 1*, the user is able to accurately type more quickly than they otherwise could.

### ***Figure 2***

5           The keyboard **102** of *Figure 1* is shown disconnected in *Figure 2*. The keyboard **102** is constructed from nine layers of textile fabric and a layer containing key registration devices. This construction has been found to be durable, and electrically sound, while providing the flexibility associated with textile fabrics. The key registration devices cause the upper surface of the  
10           keyboard to protrude at locations, such as location **201**, corresponding to the keys. The keys correspond to letters, numerals and functions found on conventional alpha-numeric keyboards. The key registration devices are over-centre silicone rubber mouldings which deform when pressed and cause the conducting layers of fabric in the sensor **106** to come into electrical  
15           contact at their location.

          The computer receiving assembly **105** is configured to engage the lower edge of the computer **101**, in the vicinity of the computer's electrical connector, to secure the computer **101** in position. A portion **202** of the receiving assembly **105**, which supports the rear surface of the computer **101**  
20           during use, houses the interface circuit. A pair of legs **203** are pivotally attached to the portion **202** which may be used to support the computer **101** in an upright position during use.

### ***Figure 3***

25           An exploded perspective view of the keyboard of *Figure 2*, illustrating its constituent layers, is shown in *Figure 3*. The fabric keyboard **102**

WO 01/75575

PCT/GB01/01429

8

comprises ten individual constituent layers, including a first electrically conductive layer **301** and a second electrically conductive layer **302**. Both of the electrically conductive fabric layers **301** and **302** have electrically conductive carbon-coated nylon fibres woven or knitted together such that each conductive layer is capable of conducting an electrical current in any direction along the plane of the layer.

The first electrically conductive layer **301** has conductive tracks **311** and **312** forming an electrical contact along the left and the right edges of the fabric keyboard respectively. The conducting tracks may be fabricated from fabric coated with conductive metals, such as silver or nickel. Material of this type is readily available and is used extensively for shielding equipment from electromagnetic interference. The tracks are secured to the conductive layers **301** and **302** using a conductive adhesive.

The tracks **311** and **312** are highly conductive compared to the carbon coated fabric of sheets **301** and **302**. Accordingly, a voltage gradient may be applied across the first electrically conductive layer **301** between the right and left edges of the detector (i.e. in an X-axis direction). The second electrically conductive layer **302** has conductive tracks **313** and **314** providing electrical contact along the top and bottom edges of the fabric layer respectively. Accordingly, a voltage may be applied across the second electrically conductive fabric layer **302** in a direction perpendicular to that which a voltage is applied across the first electrically conductive layer **301** (i.e. in the Y-axis direction).

The uppermost layer of the fabric keyboard is a continuous fabric layer **303** which has printed on its upper surface graphical representations corresponding to the alpha numeric keys of the keyboard. The graphical

WO 01/75575

PCT/GB01/01429

9

representations are preferably screen printed onto the fabric layer and, during the preferred construction process, the printing of the alpha-numerical graphical representations is performed after the fabric keyboard has been assembled. Furthermore, the fabric layer **303** is preferably made from a stretchable or heat formable fabric so as to enable the fabric to be manipulated to receive the protrusions of the over centre moulding layer **304**.

The over centre moulding layer **304** is, in this embodiment, a continuous silicon rubber sheet having key registration device mouldings protruding on its upper surface. The key registration device mouldings protruding from the upper surface layer **304** are specifically moulded so as to align with the alpha numerical graphical representations shown on the uppermost layer **303**.

There are five layers located in between the first electrically conductive layer **301** and the second electrically conductive layer **302**. A first masking layer **305** and a second masking layer **306** contact the innermost surfaces of the electrically conductive layers **301** and **302** respectively. Both masking layers **305** and **306** are composed of a flexible tear resistant fabric with a laminate coating of polyurethane applied to a surface of the fabric. In an alternative embodiment, masking layers **305** and **306** are sheets of polyurethane alone without any fabric constituent.

A series of circular holes **315** have been punched through the masking layers **305** and **306**. Each of these holes is located so as to align with a corresponding key registration device moulding **316** of layer **304**. During the use of the keyboard, the masking layers prevent electrical contact occurring between a central conducting layer **307** and either of the

WO 01/75575

PCT/GB01/01429

10

outer conducting layers **301** and **302**, except at locations which correspond to keys. Therefore, accidental compression of the keyboard at locations between the keys does not affect the operation of the keyboard.

Located in between the masking layers **305** and **306** are insulating mesh layers **308** and **309**. The insulating layers **308** and **309** are woven or knitted with a relatively wide spacing between fibres so that the conductive layers are separated while at the same time allowing conduction to take place between the conducting layers when mechanical pressure is applied. The presence of these insulating layers ensures that the overall construction may be folded and flexed or wrapped around objects without causing the two conductive layers to be brought into electrical contact and thereby producing an erroneous contact identification.

Located between the insulating mesh layers **308** and **309** is the central conductive layer **307** which is configured to conduct an electric current from the first electrically conductive fabric layer **301** to the second electrically conductive layer **302** (i.e. in the Z axis direction) whilst substantially preventing lateral current flow along the plane of the sheet (i.e. in the X and Y axis directions).

The central conductive layer **307** is constructed by knitting a polyester yarn of twenty-four decitex filaments having a single conductive filament twisted therein, such that the conductive filament appears relatively randomly in the completed knitted product. In addition, the central conductive layer **307** has a conductance perpendicular to the plane of the device (in the z axis) that increases as it is placed into pressure thereby facilitating increasing conduction between the outer conductive layers during a mechanical interaction, of increasing pressure.

WO 01/75575

PCT/GB01/01429

11

A final fabric layer **317** forms the under surface of the fabric keyboard. This layer is preferably a durable fabric cover configured to provide protection to the inner encapsulated layers of the fabric keyboard. In the preferred embodiment, the under surface of layer **317** is laminated with patches of rubber to provide a high co-efficient of friction between the keyboard and any surface onto which the keyboard is placed.

The ten layers forming the fabric keyboard are mechanically secured together by an adhesive provided around the perimeter edges of the constituent fabric layers.

In alternative constructions to the fabric sensor **106**, one of the two masking layers **305** and **306** are absent. In other alternative constructions, one or more of layers **303**, **316**, **315**, **307**, **309**, **306** and **317** are absent. Therefore, in a very simple construction, a sensor representing a keyboard may be constructed from just the conductive layers **301** and **302**, and a separating insulating layer, such as layer **308**. However, embodiments containing the second insulating layer **309** and central conducting layer **307** have greater electrical stability during folding.

#### **Figure 4A**

The first electrically conductive fabric layer **301** is shown in more detail in *Figure 4A*. Two conductive tracks **311** and **312** form the electrical contacts with the conductive fibres of fabric layer **301**. A contacting portion **411** of conductive track **311** contacts the left edge of fabric layer **301**. A conduction portion **421** of conductive track **311** is channelled into the flexible cable **104** and prevented from contacting the electrically conductive fabric layer **301** by insulation strip **401** that runs along the upper edge of

WO 01/75575

PCT/GB01/01429

12

fabric layer **301**, and shown as a shaded area in *Figure 4A*.

Similarly, the conductive track **312** contacts the electrically conductive fabric along the right edge of fabric layer **301** over a contacting portion **412**. A conduction portion **422** extends into flexible cable **104** and is prevented from contacting the electrically conductive fabric layer **301** by insulation strip **401** that runs along the upper edge of fabric layer **301**. This enables voltages to be applied between the conductive tracks **311** and **312** to provide a voltage gradient in the X axis direction.

**Figure 4B**

The second electrically conductive layer **302** is shown in more detail in *Figure 4B*. Electrical connection is formed with the fabric layer **302** by the two conductive tracks **313** and **314**. Conductive track **313** forms an electrical contact with the top edge of the electrically conductive fabric **301** via contacting portion **413**. A conduction portion **423** of conductive track **313** extends over insulation strip **402**, that extends along the top edge of the fabric layer, and enters the flexible cable **104**. Conductive track **314** forms an electrical connection with bottom edge of the fabric sheet **302** via its contacting portion **414**. A conduction portion **424** of conductive track **314** extends along the right edge of the fabric sheet and the top edge of the fabric sheet and enters into the flexible fabric cable **104**. The conduction portion **424** of conductive track **314** is electrically insulated from the fabric layer by insulating strip **402** which extends along the top edge and **403** which extends along the right edge of layer **302**.

Accordingly, voltages may be applied between the conductive tracks **313** and **314** so as to provide a voltage gradient across the electrically

WO 01/75575

PCT/GB01/01429

13

conductive fabric layer **302** from top to bottom in the Y axis direction.

In this embodiment, only four connections are possible to the fabric keyboard, two connections to conductive tracks **311** and **312** of fabric layer **301**, and two connections to conductive tracks **313** and **314** of fabric layer **302**.

5

### **Figure 5**

The interface circuit **501** located in the computer receiving assembly **105** is detailed in *Figure 5*. The interface circuit comprises a peripheral interface controller (PIC) **502** which is connected to a serial communication output **503**, for connection to the computer **101**, and electrical connections **504**, **505**, **506** and **507** configured to supply and receive the necessary voltages to the conductive tracks **311**, **312**, **314** and **313** respectively.

10

The peripheral interface controller (PIC) **502** is a programmable controller of the type PIC16C711. The PIC **502** operates under the control of a programme which controls the parameters of the keyboard which the interface circuit **501** is configured to measure. Parameters under investigation will be discussed further in reference to *Figures 6A to 6D and 7 to 10*.

15

Under control of the PIC **502**, the necessary output voltages can be supplied to electrical connections **504**, **505**, **506** and **507** via pins one, two, ten, eleven, twelve and thirteen of the PIC. The PIC includes an analogue to digital converter which is used to process analogue voltages received at pins seventeen and eighteen. The input pins seventeen and eighteen receive outputs from high impedance buffers **508** and **509** respectively. The buffers **508** and **509** are half of unity gain operational amplifiers of the type

20

25



WO 01/75575

PCT/GB01/01429

14

TL062. The buffers 508 and 509 provide a high impedance buffer between the sensor output voltages received at connections 507 and 505, and the PIC 502 input ports seventeen and eighteen respectively.

5 Connection to pins one and two occurs via resistors 510 and 511 respectively. Resistors 510 and 511 are selected according to the resistance of the keyboard as measured from a conducting track attached to one fabric layer 301 to a conducting track attached to the second fabric layer 302 while a typical mechanical interaction pressure, i.e. a key-press is applied. A value of ten Kohms is typical for resistors 510 and 511.

10 The PIC 502 has an external crystal oscillator (not shown) running at four MHz connected across pins fifteen and sixteen. Positive four volts received from the computer 101 is supplied to pin fourteen and ground is connected to pin five. Pin four (the internal reset input) is held at positive four volts via a series resistor of one hundred ohms.

15 The PIC 502 is programmed to supply and receive the necessary voltages to the conductive tracks 311, 312, 314 and 313 of the conductive layers 301 and 302. By this means the interface circuit is able to determine a measure, denoted by Z, of the pressure applied to the keyboard, and if this value is sufficiently large the interface circuit interprets this as a key-press. When a key-press is detected the interface circuit performs a measurement of the X and Y location of where the pressure is being applied. The PIC is further configured to supply data to the output serial port 503 relating to the position of key-presses detected or the absence of a key-press.

25 An overview of the measurements made by interface circuit 501 is illustrated by Figures 6A, 6B, 6C and 6D. The outer conductive layers 302

WO 01/75575

PCT/GB01/01429

15

and 301 are represented schematically by potentiometers 601 and 602 and the resistance of the conductive path between the outer layers at the location of the applied force is represented by variable resistor 603.

5     **Figures 6A**

A first measurement is shown in *Figure 6A*. Four volts are applied to connector 504, while connector 505 remains disconnected. Connector 507 is connected to ground via the resistor 511 of known value. Thus, current flows from connector 504 through a first part of layer 301 indicated by a first part 605 of potentiometer 602, through the conductive path indicated by variable resistor 603 having resistance  $R_v$ , through a first part of layer 302, indicated by a first part 606 of potentiometer 601 and through the known resistor 511. The voltage,  $V_1$  appearing at connector 507 is measured and since this is equal to the voltage drop across resistor 511,  $V_1$  is directly proportional to the current flowing from connector 504.

**Figure 6B**

A second measurement is shown in *Figure 6B*. Four volts are applied to connector 506, while connector 507 is disconnected. Connector 505 is connected to ground via the resistor 510 of known resistance. The voltage  $V_2$ , dropped across resistor 510 is measured. Voltage  $V_2$  is directly proportional to the current flowing through a second part of layer 302 indicated by a second part 608 of potentiometer 601, through the conductive path indicated by variable resistor 603 having resistance  $R_v$ , through a second part of layer 301 indicated by a second part 609 of potentiometer 602 and through resistor 510.

WO 01/75575

PCT/GB01/01429

16

The sum of the resistance of first part 606 and second part 608 of potentiometer 601 is approximately equal to the resistance between contacting portions 413 and 414 on layer 302, and is therefore substantially constant during the measurements, since they occur in rapid succession.

5 Similarly the sum of the resistance of first part 605 and second part 609 of potentiometer 602 is approximately equal to the resistance between contacting portions 311 and 312 on layer 301, and is also substantially constant during the measurements. As a result, the relationship 610 exists between the resistance  $R_v$ , of the conductive path between the outer

10 layers, and the measured voltages  $V_1$  and  $V_2$ . i.e. the resistance  $R_v$  between the outer layers is proportional to the sum of the reciprocal of voltage  $V_1$  and the reciprocal of voltage  $V_2$ .

In general, depending upon the type of position sensor used, the resistance  $R_v$  depends upon area of the applied pressure or a function of

15 the area and the force as illustrated by relationship 611. Thus, from the voltage measurements  $V_1$  and  $V_2$  a measure which is dependent on the force applied to the keyboard is determined.

### **Figure 6C**

20 A third measurement is shown in *Figure 6C*. Four volts is applied to connector 505 while connector 504 is grounded, and so a potential gradient is produced across layer 301. A voltage measurement is made at connector 507. Since the interface circuit makes use of the high impedance buffer 508, the voltage appearing on layer 302 at the position of the applied force is

25 determined. This voltage,  $V_3$  is directly proportional to the distance of the centre of the applied force from contacting portion 311 and indicates its  $X$

WO 01/75575

PCT/GB01/01429

17

axis position.

**Figure 6D**

A fourth measurement is shown in *Figure 6D*. Four volts are applied to  
connector **507** and connector **506** is grounded. A voltage measurement is  
made of voltage **V4** appearing at connector **505**. Voltage **V4** is directly  
proportional to the distance of the centre of the applied force from contacting  
portion **414** and indicates its Y axis position. Therefore, voltage **V3** and **V4**  
provide information as to the two dimensional position of the applied force on  
the sensor **106**. i.e. voltages **V3** and **V4** represent X and Y values for the  
centre of the position of the applied force, representing a key-press.

**Figure 7**

The program running within the peripheral interface circuit of *Figure 5*  
is outlined in the flow chart of *Figure 7*. The computer **101** is switched on at  
step **700** and power is supplied to the interface circuit. At step **701** the  
hardware is initialised and an initial message is sent to the computer **101** via  
the serial output port. This process is detailed later with reference to *Figure*  
*18*. At step **702** a question is asked as to whether the last data sent to the  
computer **101** was 0,0, i.e. X=0 and Y=0. During operation of the keyboard,  
the interface circuit sends positional data to the computer **101** in the form of  
two eight bit binary numbers, i.e. two numbers of value between zero and  
**255** (decimal). However, there are no key positions corresponding to 0,0 and  
the use of these zero values is reserved to indicate to the computer **101** that  
the keyboard is not being pressed. On the first occasion of entering step **702**  
the question is answered in the affirmative and so step **703** is entered where

WO 01/75575

PCT/GB01/01429

18

a Z value is measured. The Z value is dependent on the force being applied to the keyboard, and so provides an indication as to whether the keyboard is being pressed. At step 704, the measured Z value from step 703 is compared with a predetermined threshold value, and if the measured Z value is equal to or greater than the threshold value, indicating a key-press, step 705 is entered. Alternatively, if the Z value is too small, the process returns to step 702. At step 705, X and Y positional values of the press applied to the keyboard are measured and stored as temporary variables X1 and Y1. At step 706 the Z value is re-measured, by essentially the same process as step 703. At step 707, the Z value from step 706 is compared with the aforementioned threshold value, and as in step 704 if the Z value is less than the threshold value, step 702 is re-entered. But, if the measured Z is greater or equal to the threshold value step 708 is performed. At step 708, X and Y position values are re-measured and stored as X2 and Y2, by a similar process to that at step 705. The Z value is then measured again at step 709, by the same process as at step 703, and compared with the threshold value at step 710. Once again, step 702 is re-entered if the Z value has fallen below the threshold value. If the Z value is still equal to or greater than the threshold, step 711 is entered. Therefore, step 711 is only entered when the interface circuit has measured two consecutive sets of X and Y values such that the Z values measured immediately before and after each set of X and Y values is greater than or equal to a predetermined threshold value. Consequently, the stored X1, Y1 and X2, Y2 values carried forward to step 711, are likely to be the result of intended presses on the keyboard, and they are therefore treated as such by the process.

WO 01/75575

PCT/GB01/01429

19

At step **711** a question is asked as to whether X1 is equal to X2 plus or minus two, and Y1 is equal to Y2 plus or minus two. If the answer to this question is "yes", the measured positional data is regarded as stable and step **712A** is entered. Otherwise step **712B** is entered where the stored X2 value is stored as X1, and the stored Y2 value is stored as Y1, before the process returns to step **706**. Thus, if the positional data is not regarded as stable, as determined by step **711**, the process attempts to repeat steps **706** to **710** to acquire a new set of positional X,Y data values.

When the positional data is regarded at step **711** as stable, step **712A** is entered which is essentially the same as step **712B** in that the stored X2 and Y2 values are stored as X1 and Y1 respectively. However, from step **712A** the process enters step **713** where a question is asked as to whether either of the stored X1 or Y1 values differ from the last sent data values by 5 or more. For example, if the last sent data values were **48,174**, then at step **713** it is ascertained as to whether X1 is less than **44** or greater than **52**, or if Y1 is less than **170** or greater than **178**. If the answer to either of the questions is yes then step **714** is entered. Otherwise the process returns to step **706**. Therefore, step **714** is only entered if one, or both, of the present positional values is different to the last data sent, and then, at step **714**, said present position values, X1 and Y1 are sent to the computer **101** via the output port and stored as the last data sent.

Thus, positional values are only sent when they differ from the previously sent data values by more than a predetermined amount. This means that if a user keeps their finger pressing on a particular key, the PIC only sends data relating to the position of that key once. By this means, the computer's processor is saved from receiving repeated redundant positional

WO 01/75575

PCT/GB01/01429

20

data. However, if a first key is pressed and a different second key is pressed before the first is released, this may give rise to two (or more) sets of positional data being sent to the computer consecutively. Typically, during typing, a first key is pressed an instant before a second key and the first to be pressed is also the first to be released. As a result, a moment of stability exists in the period between the two key presses and a second moment of stability exists in the period between the two key releases. Provided these two moments of stability are sufficiently long, the PIC detects the stability in the X and Y values it measures and sends positional data to the computer 101 corresponding to each of the two keys pressed. Between the second key being pressed and the first key being released, the interface circuit receives voltages which imply that positions between the actual two keys are being pressed. It is likely that these positions will be found to be variable one from the next and so regarded as unstable by the PIC at step 711. However, it is possible that during such overlapping key presses, data relating to an intermediate position between the two keys might be sent to the computer 101. It is therefore, a requirement of the further processing performed by the computer 101 to recognise this as only two key presses. This will be explained further with respect to *Figure 13*.

As an example, suppose the "G" key is pressed, then a moment later the "L" key is pressed, the "G" key is released and then the "L" key released. The interface circuit measures stable positional values relating to the "G" key and sends corresponding data to the computer 101. It may then measure stable positional values relating to any of the keys positioned between "G" and "L" and send corresponding data, before it measures stable positional values relating to the "L" key and sends data corresponding to its position.

WO 01/75575

PCT/GB01/01429

21

Having sent data at step 714 the process then returns to step 706. In the event that the keyboard is no longer being pressed when the Z value is measured at steps 706 or 709, the question asked at step 707 or 710 will be answered in the negative and the process returned to step 702. At step 702,  
5 if the last data sent to the computer 101 was positional data corresponding to a pressed key, the question will be answered negatively and step 715 will be entered. At step 715 the data 0,0 is sent to the computer 101 to indicate the absence of a key-press and 0,0 is stored as the last data sent. Following step 715, step 703 is entered and the process continues as previously described.

10 In summary of the program running within the PIC, it defines a process in which positions of mechanical interactions, corresponding to key-presses, are measured and where said positions are found to be momentarily stable, positional data relating to those stable positions is sent to the computer 101. However, the data is only sent if it is different to the most recent data sent by  
15 a predetermined amount. In addition, in the event that the keyboard stops being pressed, a second data type, in this case the data 0,0, is sent to the computer 101 to indicate the absence of a key-press.

It should now be understood, that when single keys are pressed individually, the data which is sent to the computer 101 is the 0,0 data  
20 relating to the absence of a key-press, followed by positional data, followed by 0,0 data as the key is released. Also, when two keys are pressed in the aforementioned overlapping manner, the data which is sent to computer 101 is the 0,0 data, followed by two or more sets of positional data, followed by 0,0 data.

25



WO 01/75575

PCT/GB01/01429

22

**Figure 8**

Step 701 of Figure 7 is shown in further detail in Figure 8. Within the initialisation step 701, at step 801 the interrupts are cleared and then at step 802 pins sventeen and eighteen of the PIC are set up as analogue to digital converter inputs. The micro ports of a PIC16C711 may be configured as low impedance outputs or high impedance inputs, and when in high impedance input mode, pins seventeen and eighteen can be programmed to connect via an internal multiplexer, to the analogue to digital converter. At step 803 the ports which are to be used as inputs or outputs are configured in their initial state. Therefore, pins eighteen, seventeen, one, two, ten, eleven, twelve and thirteen are configured as high impedance inputs while pin seven is configured as a low impedance output. At step 804 all system variables are cleared and all interrupts are disabled. At step 805 an initial message is sent to the computer 101 confirming the presence of the keyboard 102. In response, the computer 101 will then run the keyboard application so that data received from the keyboard is correctly processed. In addition, the data 0,0 is sent to the computer 101 indicating that no keys are presently being pressed on the keyboard.

**Figure 9**

Step 703 of Figure 7 is shown in further detail in Figure 9. Within step 703, at step 901, the ports corresponding to pins two and ten are reconfigured as low impedance output ports and at step 902 pin two is set to zero volts while pin ten is set to positive four volts. Thus, connector 507 is grounded via resistor 511 and four volts are applied to connector 504. At step 903 a time delay, (typically of 200 microseconds in a sensor

WO 01/75575

PCT/GB01/01429

23

measuring 90 millimetres by 240 millimetres with an outer layer resistance of 3.5Kohms) is provided to allow voltages to settle before the voltage at pin seventeen is measured and stored. Thus, voltage V1 present at connector 507 is measured and stored as temporary variable V1.

5           At step 905 pins two and ten are reconfigured as high impedance inputs while pins one and twelve are reconfigured as low impedance outputs. At step 906 the voltages on pins one and twelve are set to zero and positive four volts respectively. Thus, connector 505 is grounded via resistor 510 while four volts are supplied to connector 506. A suitable time  
10       delay, equivalent to that at step 903, is provided at step 907 before the voltage at pin eighteen is measured and stored at step 908. Thus, the voltage present on connector 505 is measured and stored as temporary variable V2. At step 909, a Z value is calculated from stored voltages V1 and V2, as  $1/((1/V1)+(1/V2))$  and it is then stored. The pins one and twelve  
15       are reconfigured back to their initial state of high impedance inputs at step 910.

### Figure 10

Step 705 of Figure 7 is shown in further detail in Figure 10. Within  
20       step 705, at step 1001 pins one and two are reconfigured as high impedance inputs and pins ten and eleven as low impedance outputs. At step 1002 pin ten is set to zero volts and pin eleven is set to positive four volts. Thus, four volts are supplied to connector 505 while connector 504 is grounded. A delay is then provided at step 1003, (of typically 200  
25       microseconds for a sensor measuring 90mm by 240mm) to allow voltages in the sensor to settle before the voltage on pin seventeen is measured at

WO 01/75575

PCT/GB01/01429

24

step 1004. Therefore a voltage V3 present on connector 507 is measured which provides an indication of the X position of the applied force. The measured value is stored as X1.

5 Pins ten and eleven are then reconfigured as high impedance inputs and pins twelve and thirteen are reconfigured as low impedance outputs at step 1005. The voltage on pin twelve is then set to zero while the voltage on pin thirteen is set to four volts at step 1006. Thus, four volts are supplied to connector 507 while connector 506 is grounded. A time delay is provided at step 1007, similar to that at step 1003, before the voltage appearing at  
10 pin eighteen is measured at step 1008. Thus, a voltage V4 present on connector 505 is measured which provides an indication of the Y position of the applied force, and stored as temporary variable Y1. Pins twelve and thirteen are then reconfigured back to their initial state of high impedance inputs at step 1009.

15

### **Figure 11**

A rear view of Palm 101 is shown in *Figure 11*. The rear of the computer 101 includes ten electrical connections referred to as pins, such as pins 1102, 1103 and 1110. Pin 1102 provides approximately four volts to  
20 the interface circuit through a 330 Ohm resistor within the computer 101. From the computer's perspective, pin 1103 is the receive data connection, therefore data from interface circuit 501 is supplied to this pin. Signal ground is provided by pin 1110 and for this particular application the remaining pins are not used.

25

WO 01/75575

PCT/GB01/01429

25

**Figure 12**

A schematic view of computer 101 is shown in *Figure 12*. The computer includes a power supply 1201 comprising rechargeable batteries. The batteries conventionally supply electrical power to various components of the computer, but in this embodiment they also supply power to the interface circuit 501 through the computer's pins 1102 and 1110 as mentioned above. The computer further comprises a processor 1202 which is in communication with the computer's touch sensitive display 103, the computer's hardware buttons 1203 and memory 1204. Amongst other functions, the processor 1202 runs the keyboard application program resident in the memory 1204, which was downloaded in a "Hotsync" process as previously described. When running the keyboard application, the processor receives data sent by the interface circuit 501 via pin 1103 and processes the received data to generate display data representing characters such as letters and numbers, which it then stores in a keyboard buffer for display on the LCD display 103.

**Figure 13**

The keyboard application program running in the computer 101 is illustrated by the flow chart of *Figure 13*. Following the computer being switched on at step 1301 it receives the initial message sent by the PIC 502, as identified at step 805 on *Figure 8*. At step 1302 the computer 101 receives the initial message, then at step 1303 the computer's operating system starts the keyboard application. At step 1304 the initial data 0,0 sent by the PIC, as identified at step 805, is received and at step 1305 the received data is looked up in a table where corresponding character data, is

WO 01/75575

PCT/GB01/01429

26

retrieved and stored as both temporary variables "present character" and "last character sent". Where the received data relates to the position of an interaction with the keyboard, i.e. a key-press, the character data retrievable from the look up table corresponds to data recognised by the computer to display characters such as letters, numbers and brackets or perform typing functions such as "shift", "backspace", "control", "return", etc. However, in this instance, the received data is 0,0, and so the data retrieved from the table corresponds to the null character, rather than a display related character.

At step 1306 data stored as "present character" is stored as the temporary variable "last character received". So, in the first instance of entering step 1306, the null character is stored as "last character received", and, as always, the value of "last character received" relates to the last data received from the PIC.

At step 1307 the processor waits to receive more data from the interface circuit before entering step 1308 where the newly received data is looked up in the look up table, and new character data is retrieved and stored as "present character". At step 1309, a question is asked as to whether "last character received" is the null character and "present character" is not the null character. If the question is answered yes, as it will be in the first instance of a key-press, step 1310 is entered where the data stored as "present character" is sent to the keyboard buffer for display purposes. In addition, the data stored as "present character" is stored as "last character sent". Thus, the last character sent to the keyboard buffer is recorded.

WO 01/75575

PCT/GB01/01429

27

The process then re-enters **1306** where the data stored as "present character" is also stored as "last character received". The processor then waits for the receipt of further data at step **1307** before repeating steps **1308** and **1309**.

5           The second time step **1309** is entered is an example of when the question will be answered in the negative, since the "last character received" is no longer the null character. If the question at step **1309** is answered "no" then step **1311** is entered where a question is asked as to whether "last character received" is not the null character and "present  
10           character" is the null character. If this question is answered negatively, the process returns to step **1306** and steps **1306** to **1309** are repeated. This would occur if both "last character received" and "present character" correspond to positional data received from the PIC, as would happen during the aforementioned overlapping key-presses.

15           If the question asked at step **1311** is answered in the affirmative, then step **1312** is entered. This situation corresponds to the release of a key leaving the keyboard with no keys pressed. Said released key could have been an individually pressed key or the second of two keys in an overlapping key-press. At step **1312** a further question is asked as to  
20           whether "last character received" is the same as "last character sent". In the case of a single key being individually pressed and released, the answer to this question will be "yes", and the process returns to step **1306**. However, in the case of an overlapping key-press the answer to this question will be "no", resulting in "last character received" being sent to the keyboard buffer  
25           at step **1313**, and "present character" being stored as "last character sent". The process then returns to **1306**.

WO 01/75575

PCT/GB01/01429

28

By this process, the computer's processor is able to receive data relating to individual key-presses and generate data corresponding to a single character. It is also able to receive data relating to two overlapping key-presses and generate data for the corresponding two characters.

5 In the above described embodiment the processing of the signals received from the keyboard sensor, i.e. from the conducting layer **301** and **302**, is performed by the PIC and further by the processor located within the computer. However, in an alternative embodiment, the process described with respect to *Figure 13* is performed by the PIC in interface circuit **501**,  
10 along with the process of *Figure 7*. Thus, the computer is supplied with data which it recognises as originating from a keyboard and corresponding to characters for display on its LCD **103**. The processing workload of the computer may thus be reduced. This embodiment is more appropriate where the processing power of the computer is more limited.

15 In another alternative embodiment, a similar process to that described with respect to *Figure 13* is performed by the PIC in interface circuit **501**, along with the process of *Figure 7*. However, in this embodiment the keyboard **102** is connected to a serial input port of a mobile phone and the PIC is configured to send AT commands to the  
20 phone in response to key-presses. By this means, a user is able to enter text to the phone for, for example, Short Message Service (SMS) messages.

#### **Figure 14**

25 A photocopier **1401** providing a further alternative embodiment of the present invention is shown in *Figure 14*. The photocopier is arranged to

WO 01/75575

PCT/GB01/01429

29

receive original documents via feeder **1402**, and under manual instructions input at touch screen **1403**, produce photocopies which are delivered at collating trays **1404**. The rectangular touch screen **1403** displays an array of keys representing numerals and a variety of functions. Thus, for example, a user may select the number of copies for print by pressing the corresponding number keys, and select paper size, enlargement ratio, collating requirements etc. by pressing the function key followed by number keys where necessary. The touch screen therefore provides a replacement for a conventional keyboard with hardware buttons or keys.

### **Figure 15**

The touch sensitive screen **1403** and a micro-controller **1501** located in the photocopier **1401** are shown schematically in *Figure 15*. The micro-controller **1501** is in communication with a memory device **1502**, along with various transducers (not shown) located within the photocopier and necessary for its operation.

The touch sensitive screen **1403** includes a liquid crystal display **1503** which has a glass sheet **1504** as its uppermost layer. The glass sheet **1504** has an electrically conductive transparent coating applied to its upper surface. This is then held parallel to a transparent plastic sheet **1505** having an electrically conductive transparent coating on its lower surface. The two sheets **1504** and **1505** are held very close together and a small mechanical pressure, such as produced by a user's finger applied to upper sheet **1505**, results in electrical contact being made between the two sheets. The plastic sheet **1505** has highly conductive tracks **1506** and **1507** located along its two shorter opposing edges and in contact with the conductive coating.



WO 01/75575

PCT/GB01/01429

30

These conductive tracks **1506** and **1507** are connected to input/output ports of the controller **1501**. Thus, the controller is able to apply a voltage across the conductive layer on the upper sheet. In a similar manner a pair of highly conductive tracks **1508** and **1509** are located on the lower conductive coating adjacent to the opposing longer edges of the sheet **1504**. These tracks **1508** and **1509** are also connected to input/output ports of the micro-controller.

The memory device **1502** contains operating instructions which the micro-controller accesses and executes. Amongst other things, the operating instructions include those for supplying voltages to the touch screen's conducting tracks **1506** to **1509** and for processing signals received from said tracks. Operating under said instructions the processor performs processes analogous to those described with reference to *Figures 7 to 10* and *13*, and hence is able to interpret signals received from the touch sensitive screen **1403** as key-presses of a keyboard. In particular, it is able to receive signals produced from overlapping key-presses and generate data corresponding to two typed characters.

In an alternative embodiment, the photocopier includes a second controller which performs the functions carried out by the PIC **501** in the first embodiment. Thus, the two controllers in the photocopier co-operate in a similar manner to the PIC **501** and processor **1202**.

Like the first described embodiment, only four connections are possible to the touch sensor of the photocopier **1401**, two connections to conductive tracks **1506** and **1507** of layer **1505**, and two connections to conductive tracks **1508** and **1509** of layer **1504**.

WO 01/75575

PCT/GB01/01429

31

In a further alternative embodiment, a personal computer (PC) is connected to a monitor with a capacitive touch sensitive screen. An example of a suitable touch sensitive monitor is presently supplied by Farnell Electronic Components Limited, of Leeds, U.K, as a 15" XGA  
5 Capacitive Touch monitor, LMU-TK15AT. The touch sensitive monitor provides serial data to the PC, comprising XY positional data relating to where it is being touched and other data identifying the absence of a touch. Application software allowing the PC to receive and interpret the signals from the touch sensitive device are installed on its hard drive.

10 When the touch sensitive device is used, the PC's processor runs the application software which performs a similar process to that detailed earlier in respect of *Figure 13*. Thus, for example, it is possible for the PC to display an array of buttons on the touch sensitive screen of its monitor and the application software allows a user to select a button by touching the  
15 screen at the correct position. Moreover, the PC is able to correctly identify two pressed keys when the user makes overlapping "key-presses" to the touch sensitive screen in the manner previously described.

It may be seen from the above embodiments, that the process for generating characters from overlapping key-presses is applicable to many  
20 alternative data processing apparatuses, where positional data is derived from a single positional sensor, which is used to simulate actions of a keyboard. Furthermore, many types of sensor, such as fabric and non-fabric resistive touch sensors, and capacitive touch sensors, are capable of supplying the data required by the data processing apparatus.

WO 01/75575

PCT/GB01/01429

32

**Claims**

1. Data processing apparatus configured to receive signals from an input sensor arranged to duplicate or replace operations of a keyboard, said signals corresponding to positions of mechanical interactions with said sensor, said apparatus comprising:

processing means configured to process data derived from said input sensor including positional data corresponding to the position of a mechanical interaction with said input sensor and a second data type corresponding to the absence of a mechanical interaction with said input sensor, wherein said processing means is configured to generate data representing a first character in response to processing an item of data of said second type followed by positional data corresponding to a first position, and to generate data representing a different second character in response to processing positional data corresponding to a different second position followed by an item of data of said second type.

2. Data processing apparatus according to claim 1, wherein said input sensor comprises a first conducting layer and a second conducting layer, each of said conducting layers having a conductive track positioned along opposing edges, and said data processing apparatus is configured to apply a voltage between said conductive tracks of said first layer and to measure the voltage appearing at a conductive track of said second layer to determine said positional data.

25

WO 01/75575

PCT/GB01/01429

33

3. Data processing apparatus according to claim 1 or claim 2, wherein said processing means is configured to:

5 (a) perform a first measurement relating to the position of a mechanical interaction with said sensor to generate a first measurement value;

(b) perform a second measurement relating to the position of said mechanical interaction to generate second value; and

(c) generate said positional data only when said first value is within a predetermined amount of said second value.

10

4. Data processing apparatus according to any of claims 1 to 3, wherein said sensor is an XY position sensor, and said positional data corresponds to the position within a continuous area defined by said sensor.

15

5. Data processing apparatus according to any of claims 1 to 4, wherein said processing means is configured to measure a parameter of said sensor relating to the pressure applied to said sensor.

20

6. Data processing apparatus according to claim 5, wherein said positional data is generated by said processing means only when said measured parameter exceeds a predetermined amount.

25

7. Data processing apparatus according to any of claims 1 to 6, wherein said data processing apparatus comprises a hand-held computer.

WO 01/75575

PCT/GB01/01429

34

8. Data processing apparatus according to any of claims 1 to 7, wherein said processing means comprises two processing devices, such that:

5 one of said processing devices is configured to receive said signals from said input sensor and to generate said positional data and data of said second data type; and

the second of said processing devices is configured to process said positional data and data of said second data type to generate data  
10 corresponding to displayable characters.

9. Data processing apparatus according to claim 8, wherein second processing device is located in a computer.

15 10. Data processing apparatus according to any of claim 8 or 9, wherein said first processing device forms part of a keyboard assembly.

11. Data processing apparatus according to any of claims 8 to 10, wherein said first processing device is configured to generate a stream of  
20 data comprising positional data, and to send positional data to said second processing device only when an item of positional data differs from the immediately preceding item of sent data by more than a predetermined amount.

25 12. Data processing apparatus according to any of claims 1 to 11, wherein said input sensor forms part of said data processing apparatus,

WO 01/75575

PCT/GB01/01429

35

and said input sensor comprises at least two layers of conductive fabric.

5           **13.** A method of processing signals received from an input sensor arranged to replace operations of a keyboard, said signals corresponding to positions of mechanical interactions with said sensor, wherein said method comprises:

          processing data derived from said signals, said data comprising positional data corresponding to the position of a mechanical interaction with said input sensor and a second data type corresponding to the  
10       absence of a mechanical interaction with said input sensor, such that data representing a first character is generated in response to processing an item of data of said second type followed by positional data corresponding to a first position, and data representing a different second character is generated in response to processing positional data corresponding to a  
15       different second position followed by an item of data of said second type.

**14.** A method of processing signals according to claim 13, wherein said input sensor comprises a first conducting layer and a second conducting layer, each of said conducting layers having a conductive track  
20       positioned along opposing edges, and said data processing apparatus is configured to apply a voltage between said conductive tracks of said first layer and to measure the voltage appearing at a conductive track of said second layer to determine said positional data.

25           **15.** A method of processing signals according to claim 13 or claim 14, wherein said method includes the steps of:

WO 01/75575

PCT/GB01/01429

36

(a) performing a first measurement relating to the position of a mechanical interaction with said sensor to generate a first measurement value;

5 (b) performing a second measurement relating to the position of said mechanical interaction to generate second value; and

(c) generating said positional data only when said first value is within a predetermined amount of said second value.

10 **16.** A method of processing signals received from an input sensor according to any of claims **13** to **15**, wherein said sensor is an XY position sensor, and said positional data corresponds to the position within a continuous area defined by said sensor.

15 **17.** A method of processing signals received from an input sensor according to any of claims **13** to **16**, wherein a parameter of said sensor relating to the pressure applied to said sensor is measured, and said positional data is generated by only when said parameter exceeds a predetermined amount.

20 **18.** A method of processing signals received from an input sensor according to any of claims **13** to **17**, wherein a stream of data comprising positional data is generated, and an item of positional data is processed to generate data representing a character only when said item of positional data differs from the immediately preceding item of data in said stream by  
25 more than a predetermined amount.

MAY 01 2002

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
11 October 2001 (11.10.2001)

PCT

(10) International Publication Number  
**WO 01/75575 A3**(51) International Patent Classification<sup>7</sup>: G06F 3/033, 3/023, G06K 11/12

(74) Agent: ATKINSON, Ralph; Atkinson Burrington, 25-29 President Buildings, President Way, Sheffield S4 7UR (GB).

(21) International Application Number: PCT/GB01/01429

(22) International Filing Date: 30 March 2001 (30.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0007679.4 30 March 2000 (30.03.2000) GB

(71) Applicant (for all designated States except US): ELEC-TROTEXTILES COMPANY LIMITED [GB/GB]; Charter Court, Midland Road, Hemel Hempstead, Hertfordshire HP2 5GE (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SANDBACH, David, Lee [GB/GB]; Flat C, 9 Westbourne Road, London N7 8AR (GB). CHAPMAN, Christopher [GB/GB]; 2 Spring Lane, Watlington, Oxon OX9 5QL (GB).


Published:

— with international search report

(88) Date of publication of the international search report:  
7 March 2002

[Continued on next page]

(54) Title: DATA PROCESSING APPARATUS

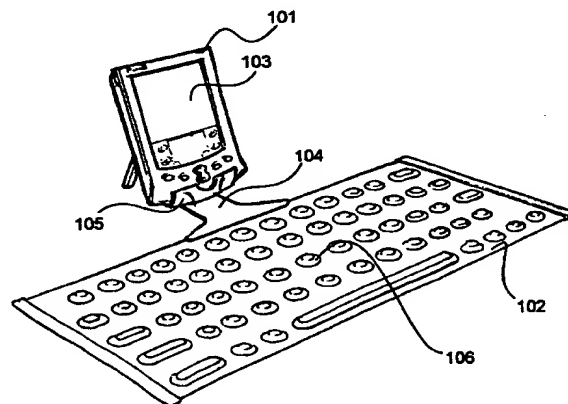

(57) Abstract: Data processing apparatus (101 and 102) configured to receive signals from an input sensor (106) arranged to duplicate or replace operations of a keyboard, in which the signals correspond to positions of mechanical interactions with the sensor (106). The apparatus comprises processing means (1202) configured to process data derived from the input sensor including positional data corresponding to the position of a mechanical interaction with said input sensor (106) and a second data type corresponding to the absence of a mechanical interaction with said input sensor. The processing means (1202) is configured to generate data representing a first character in response to processing an item of data of said second type followed by positional data corresponding to a first position, and to generate data representing a different second character in response to processing positional data corresponding to a different second position followed by an item of data of said second type.

WO 01/75575 A3





*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 01/01429

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G06F3/033 G06F3/023 G06K11/12

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06K G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data, IBM-TDB

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 053 585 A (YANIGER STUART I) 1 October 1991 (1991-10-01) the whole document	1,13,17
Y		2,4-10, 12,14,16
Y	EP 0 989 509 A (ELECTROTEXTILES COMP LTD) 29 March 2000 (2000-03-29) column 3, line 30 -column 4, line 16 column 10, line 44 -column 10, line 35 column 12, line 29 -column 14, line 23	2,4-10, 12,14,16
A	EP 0 343 808 A (MCGAVIGAN JOHN & CO LTD) 29 November 1989 (1989-11-29) column 3, line 41 -column 4, line 4 -/--	2,4-9, 14,16

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

26 November 2001

Date of mailing of the international search report

04/12/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Bailas, A

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 01/01429

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>PATENT ABSTRACTS OF JAPAN  vol. 016, no. 337 (P-1390),  22 July 1992 (1992-07-22)  &amp; JP 04 100139 A (YOKOGAWA ELECTRIC CORP),  2 April 1992 (1992-04-02)  abstract  -----</p>	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 01/01429

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5053585	A	01-10-1991	AU 8763491 A JP 2787959 B2 JP 6502507 T WO 9207345 A1	20-05-1992 20-08-1998 17-03-1994 30-04-1992
EP 0989509	A	29-03-2000	GB 2341929 A GB 2341930 A GB 2341931 A AU 4877099 A EP 1132853 A1 EP 1132854 A1 EP 1100044 A1 EP 0989509 A2 JP 2000112640 A GB 2341932 A , B GB 2341978 A , B GB 2341933 A , B	29-03-2000 29-03-2000 29-03-2000 30-03-2000 12-09-2001 12-09-2001 16-05-2001 29-03-2000 21-04-2000 29-03-2000 29-03-2000 29-03-2000
EP 0343808	A	29-11-1989	EP 0343808 A2 GB 2218212 A , B	29-11-1989 08-11-1989
JP 04100139	A	02-04-1992	NONE	